

Skyline Automate | 35mm

The motorized Skyline roller shade system offers a range of three Automate motors with two tube diameters to suit a variety of applications. Featuring ARC (Automate Radio Communication), the 35mm Skyline Automate system provides an intelligent, Li-ion battery or a DC powered solution.

AESTHETIC FEATURES


- Slim motor head for minimal light gap

ASSEMBLY / PRODUCTION FEATURES

- Greater flexibility with installation with spring loaded pin end
- Crown, drive and adapters available to suit variety of tube sizes

FUNCTIONAL BENEFITS

- Leveling control
- Simple limit setting and adjustment
- Favorite position
- 3 operational speed settings
- 2-way RF communication
- ARC protocol for simple programming

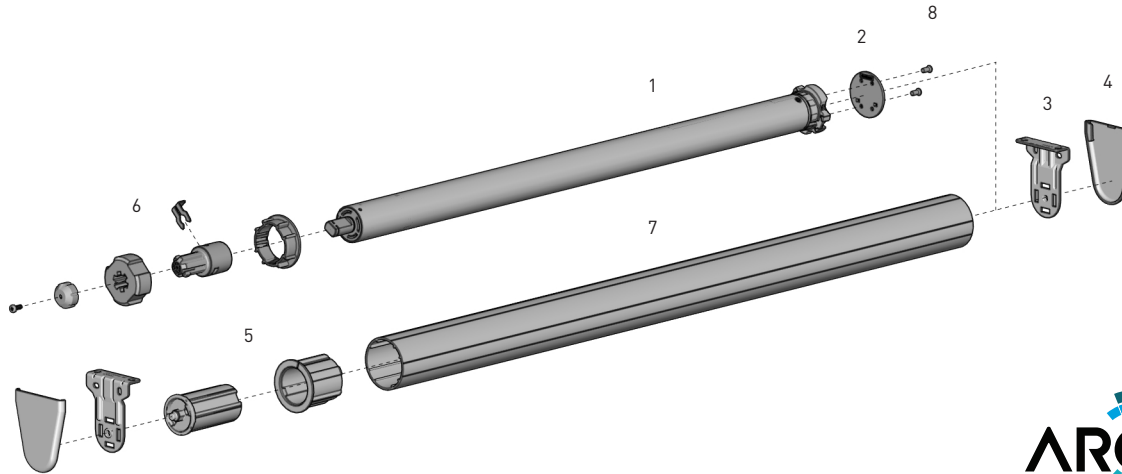

SYSTEM INDEX

- Automate Motor | 28mm
 - MTDCBRF35-2 - Li-ion Q3.0
 - MTDCRF35-2 - DCRF 3.0
 - MTACRF35-6 - ACRF 6
 - MTACQRF35-6 - ACRF Q6
- Motor Adapter
MTAD-252835-SL
- Brackets
SLB###x
SLNB###x
- Bracket Covers
SLBC###x
SLNBC###x
- Pin End & Adapter
SLPEHD53XX + RA2xx
- Crown and Drive Kit
MTCRDR-28-2 - Kit for 2" tube
- Aluminium Tube
RTEA5T## - 2" tube
- Screws for Adapter
SLAMSCREW

- Size
xxx- Color

PRODUCT OPTIONS

SUN SENSOR



SYSTEM UPGRADES

- CASSETTE 80/100/120
- FASCIA 3"/4"/5"
- LINK SYSTEM
- POCKETS 3"/4"/5"/6"

CONTROL OPTIONS

PARADIGM REMOTES



WALL SWITCH



SMART HOME



PULSE



CHARGERS

ELECTRIC




SOLAR




SPECIFICATIONS

DEDUCTION CHART

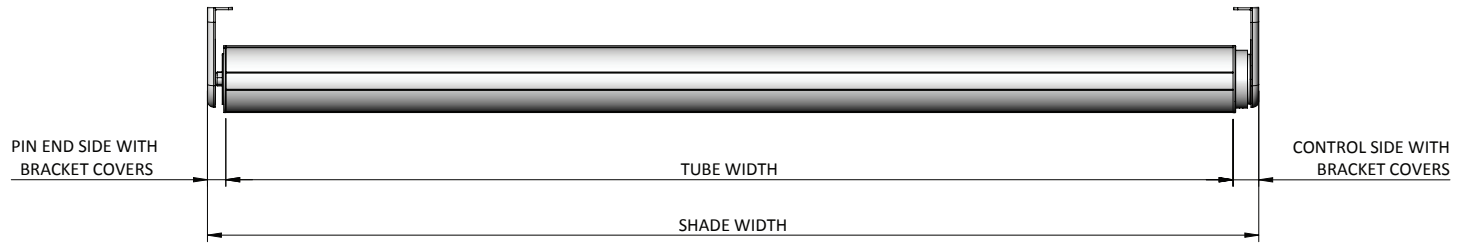


MOTOR	BRACKETS	PIN END	CONTROL SIDE	OVERALL DEDUCTION
MTDCBRF35-3/ MTDCRF35-3/ MTACRF35-6/ MTACQRF35-6	With Bracket Covers	0.55" (14mm)	0.79" (20mm)	1.34" (34mm)
	No Bracket Covers	0.51" (13mm)	0.75" (19mm)	1.22" (31mm)

MAX ROLL

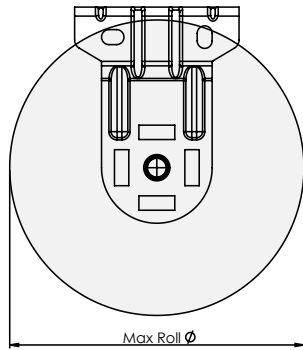

BRACKET	MAX ROLL SIZE
SLxx650xx	2.35" [59.0mm]
SLxx660xx	3" [76.2mm]
SLxx680xx	4" [101.6mm]
SLxx690xx	5" [127.5mm]

TUBE SPECS




2.0" Tube

Code: RTEA5T12 (with tape)
RTEA5U12
RETA5T16(with tape)
RTEA5U16
OD: 2.0" (51mm)
Length 12', 16'
(3.66m, 4.88m)

MAX DROP
2.0" TUBE
4.59' [1.40m]
13.12' [4.00m]*

* Recommended Max Drop. Exceeding this value may cause fabric tracking issues

35mm SYSTEM CAPACITY

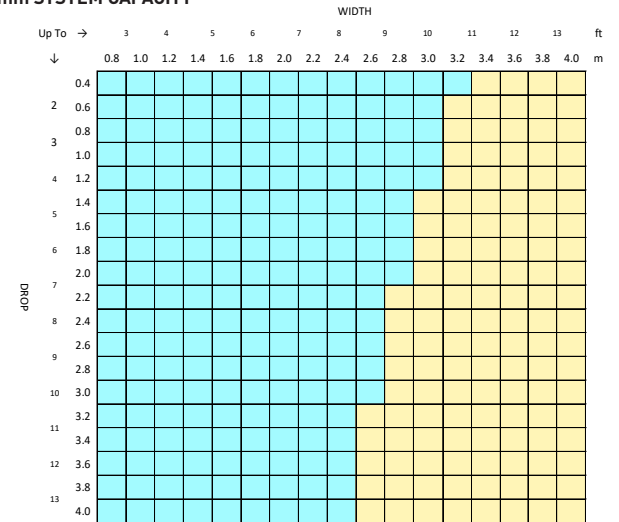

Fabric Thickness: 0.024" [0.60mm]
Fabric Density: 12.39oz/yd² [420gsm]
Weight Bar: D30 Silent Medium Aluminium Bottom Rail

ACRF Q6 MIN. WIDTH 0.7m (2.30')
ACRF 6 MIN. WIDTH 0.73m (2.40')
DCRF 3.0 MIN. WIDTH 0.6m (2.00')
Li-ion Q3.0 MIN. WIDTH 0.8m (2.60')

CONTROL	TUBE	LINK SYSTEM
35mm Tube	RTEA5T## - 2.0"	